




外接触齿形链

Flank contact chains

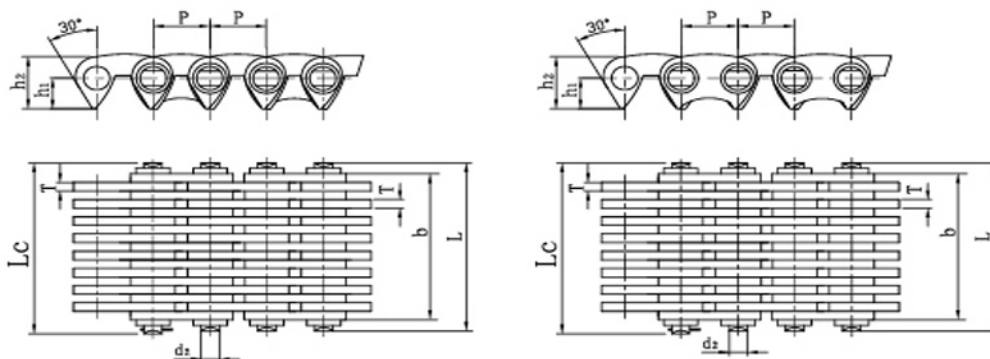

GB 链号 GB Chain No.	节距 Pitch	链宽 Chain width	轴承直径 Pin diameter	销轴长度 Pin length		孔间到齿间距离 Distance from hole centre to tooth	链板高度 plate depth	导向形式 Guide form	片数 Number of plaies	极限拉伸荷载 Ultimate tensile strength	每米长重 Weight per meter
	P mm	B min mm	d2 max mm	L max mm	Lc max mm	h1 mm	h2 max mm		N	Q min kN/lbf	q kg/m
CL06	9.525	13.5	3.28	18.5	20.0	5.3	10.0	外 (Outside)	9	10.0	0.6
		16.5		21.0	23.0			外 (Outside)	11	12.5	0.73
		19.5		24.5	26.0			外 (Outside)	13	15.0	0.85
		22.5		27.5	29.0			外 (Outside)	15	17.52	1
		28.5		33.5	35.0			外 (Outside)	19	22.5	1.26
CL08	12.700	19.5	5.08	24.5	26.0	7.0	13.4	外 (Outside)	13	23.4	1.15
		22.5		27.5	29.0			外 (Outside)	15	27.4	1.33
		25.5		30.5	32.0			外 (Outside)	17	31.3	1.5
		28.5		33.5	35.0			内 (Inside)	19	35.2	1.68
		34.5		39.5	41.0			内 (Inside)	23	43.0	2.04
CL10	15.875	40.5	5.92	45.5	47.0	8.7	16.7	内 (Inside)	27	50.8	2.39
		46.5		51.5	53.0			内 (Inside)	31	58.6	2.74
		52.5		57.5	59.0			内 (Inside)	35	66.4	3.1
		30.0		37.0	38.2			内 (Inside)	15	45.6	2.21
		38.0		45.0	46.2			内 (Inside)	19	58.6	2.8
CL12	19.050	46.0	6.90	53.0	54.2	10.50	20.0	内 (Inside)	23	71.7	3.39
		54.0		61.0	62.4			内 (Inside)	27	84.7	3.99
		62.0		69.0	70.4			内 (Inside)	31	97.7	4.58
		38.0		45.0	46.5			内 (Inside)	19	70.0	3.37
		46.0		53.0	54.5			内 (Inside)	23	86.0	4.08
CL16	25.400	54.0	8.9	61.0	62.8	14.0	26.70	内 (Inside)	27	102.0	4.78
		62.0		69.0	70.8			内 (Inside)	31	117.0	5.5
		70.0		77.0	78.8			内 (Inside)	35	133.0	6.2
		45.0		52.0	53.5			内 (Inside)	15	111.0	5.31
		51.0		58.0	59.5			内 (Inside)	17	125.0	6.02
CL20	31.750	57.0	10.84	64.0	65.5	17.5	33.40	内 (Inside)	19	141	6.37
		69.0		76.2	77.7			内 (Inside)	23	172.0	8.15
		81.0		88.2	89.7			内 (Inside)	27	203.0	9.57
		93.0		100.2	101.7			内 (Inside)	31	235.0	10.98
		57.0		66.6	69.6			内 (Inside)	19	165.0	8.42
CL24	38.10	69.0	12.8	78.6	81.6	20.96	40.01	内 (Inside)	23	201.0	10.19
		81.0		90.6	93.6			内 (Inside)	27	237.0	11.96
		93.0		102.6	105.6			内 (Inside)	31	273.0	13.73
		105.5		114.6	117.65			内 (Inside)	35	310.0	15.5
		117.0		126.6	129.6			内 (Inside)	39	346.0	17.27
CL24	38.10	117.0	12.8	129.0	131.0	20.96	40.01	内 (Inside)	39	415.0	20.73
		129.0		141.0	143.0			内 (Inside)	43	458.0	22.86
CL24	38.10	141.0	12.8	153.0	155.0	20.96	40.01	内 (Inside)	47	502.0	24.99