




摩托车链条 Motorcycle chains

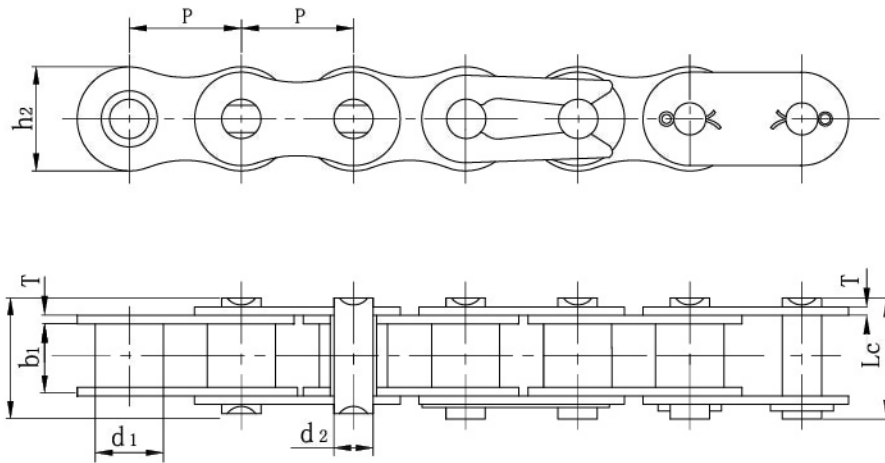

链号 ANSI/ISO Chain No.	节距	滚子直径	内节内宽 Width between inner plates	销轴直径	销轴长度		内链板高度	链板厚度	极限拉伸荷载	每米长重
	Pith	Roller diameter		Pin diameter	Pin length		inner plate depth	Plate thickness	Ultimate tensile strength	Weight per meter
	P	d1 max	b1 min	d2 max	L max	Lc max	h2max	T max	Q min	q
	mm	mm	mm	mm	mm	mm	mm	mm	kN/lbf	kg/m
*04C	6.350	3.30	3.18	2.31	7.91	8.50	6.00	0.80	3.5	0.15
*04CH	6.350	3.30	3.18	2.31	8.70	9.6	6.00	1.04	4.8	0.17
*219H	7.774	4.59	5.00	3.01	11.60	12.7	7.40	1.2/1.04	6.6	0.28
*T8F	8.000	4.69	4.90	3.28	11.70	12.8	7.60	1.3/1.1	7.0	0.35
*270H	8.500	5.00	4.75	3.28	13.15		8.40	1.8/1.4	9.8	0.33
*T3F	9.525	6.00	9.50	4.50	18.70		9.30	1.88/1.50	11.8	0.61
475	12.700	7.75	2.40	3.65	7.95	9.5	9.91	1.20	8.5	0.25
410	12.700	7.75	3.40	3.65	10.60	12.1	9.91	1.20	8.5	0.28
415	12.700	7.75	4.88	3.65	12.40	13.9	10.30	1.20	9.0	0.33
415H	12.700	7.75	4.88	3.96	14.35	15.5	12.00	1.50	16.0	0.51
420	12.700	7.77	6.35	3.96	14.70	15.98	12.00	1.50	16.0	0.55
420H	12.700	7.77	6.35	3.96	15.70	17.0	11.80	1.80	17.0	0.63
428	12.700	8.51	7.75	4.45	16.70	18.1	11.80	1.60	17.8	0.69
428H	12.700	8.51	7.94	4.45	18.70	20.1	15.00	2.03	20.6	0.79
520	15.875	10.16	6.35	5.08	17.80	18.9	15.00	2.03	26.5	0.89
520H	15.875	10.16	6.35	5.08	18.70	20.5	15.00	2.42	26.5	1.10
525	15.875	10.16	7.94	5.08	19.40	20.5	15.00	2.03	26.5	1.06
525H	15.875	10.16	7.94	5.08	20.50	22.2	15.00	2.42	26.5	1.20
530	15.875	10.16	9.50	5.08	20.50	22.2	15.00	2.03	26.5	1.06
530H	15.875	10.16	9.50	5.08	22.00	23.5	15.00	2.42	32.8	1.24
630	19.050	11.91	9.50	5.94	22.70	25.0	18.00	2.42	35.2	1.80
630H	19.050	11.91	9.50	5.94	25.90	27.8	18.00	3.25	42.0	2.16

*套筒链：表中滚子直径d1为套筒直径

Bush chain: d1 in the table indicates the external diameter of the bush